

# Cougar™ Push-Pull Guns

## Processes

MIG, Pulsed MIG

## Product Number

K2704-2 Air Cooled, 25 ft. (7.6 m)

K2704-3 Air Cooled, 50 ft. (15.2 m)

## Air-Cooled Amperage Rating @

60% Duty Cycle

Argon: 300A

## Wire Diameter Range in. (mm)

.035 - 1/16 (0.9 - 1.6) Aluminum

## Premium Semiautomatic Pistol-Grip Guns for Aluminum Welding.

Cougar™ push-pull guns are intended for those operators who prefer an upright pistol-grip design for aluminum welding fabrication or production environments.

### FEATURES

#### ▶ Fatigue-Reducing Comfort, More Control

- Sure-Grip™ Handle – Lightweight, well balanced pistol grip fits comfortably in either hand.
- Refined Adjustment – A multi-turn potentiometer allows both left and right-handed operators to make precise wire feed speed changes.
- Improved Strain Relief – Integrated system flexes to enhance operator comfort while protecting internal wiring.

#### ▶ Greater Peace of Mind

- Better Protection – The recessed gun trigger eliminates accidental breaking.
- Wear-Resistant Security – An abrasion-resistant cable cover prevents power cable chafing.

#### ▶ Fast Changeovers and Easy Repairs

- Tool-less Drive Roll Changes – Our slip-fit dual-groove drive rolls feature a D-contour to prevent unwanted spinning.
- Lincoln Copper Plus™ Contact Tips - Larger tip diameter and mass improves heat dissipation to increase tip life.
- Gas Leak Prevention – The Posi-Seat™ gun barrel locking nut seats snugly to prevent gas leaks.
- Interchangeable Expendables – Parts are shared with our Magnum® PRO and Panther™ guns to minimize part stocking.



### WHAT'S INCLUDED

- ▶ .035 in. (0.9 mm) Contact Tip (Qty. 1)
- ▶ 3/64 in. (1.2 mm) Contact Tip (Qty. 1)
- ▶ 0.625(5/8) in. (15.9 mm) Thread-On Gas Nozzle with 1/8 in. (3.2 mm) recess
- ▶ Thread-On Diffuser
- ▶ .035 - 3/64 Drive Roll
- ▶ .035 - 1/16 Wire Conduit

### COMPATIBLE WIRE FEEDERS

- ▶ POWER MIG® 350MP
- ▶ Power Wave® C300
- ▶ Power Feed™ 10M
- ▶ Power Feed™ 25M

### APPLICATIONS

- ▶ Aluminum Fabrication
- ▶ Aluminum Production
- ▶ Shipbuilding



EN / IEC 60974-7

1

YEAR WARRANTY  
PARTS AND LABOR  
AÑOS DE GARANTIA  
PARTES Y MANO DE OBRA  
ANS DE GARANTIE  
PIÈCES ET MAIN D'OEUVRE

THE LINCOLN ELECTRIC COMPANY

22801 St. Clair Avenue • Cleveland, OH U.S.A. • 44117-1199

PH: +1.216-481-8100 • www.lincolnelectric.com

## EXPENDABLE PARTS

### WIRE CONDUITS

Length ft. (m)	Wire Diameter in. (mm)	Part Number
15 ft. (4.5)	.035 - 1/16 (0.9 - 1.6)	KP2881-15
25 ft. (7.6)	.035 - 1/16 (0.9 - 1.6)	KP2881-25
50 ft. (15.2)	.035 - 1/16 (0.9 - 1.6)	KP2881-50

### GUN BARRELS

Angle (Degrees)	Cooling System	Part Number
60	Air-Cooled	KP2877-60
45	Air-Cooled	KP2877-45
180	Air-Cooled	KP2877-180

### GAS DIFFUSER

Type	
Pkg. Qty.	Thread-on
1	KP2746-1
25	KP2746-1-B25



Thread-on Gas Diffuser

### ALUMINUM CONTACT TIP FOR PUSH PULL

Wire Diameter in. (mm)	Part Number
.035 (0.9)	KP2744-035A
3/64 (1.2)	KP2744-364A
3/64 (1.2)*	KP2744-364A5356
1/16 (1.6)	KP2744-116A

\* For low amperage 5356 wire applications.

### GUN TUBE INSULATOR

Pkg. Qty.	Part Number
1	KP2773-2
25	KP2773-2-B25



Gun Tube Insulator

### GAS NOZZLE

		Nozzle Diameter (I.D.)	
Thread-on	Nozzle	0.5 in. (12.7 mm)	0.625(5/8) in. (15.9 mm)
	1/8 (3.2)	KP2742-1-50R	KP2742-1-62R
	Recess	KP2742-1-50R-B25	KP2742-1-62R-B25
	Flush	KP2742-1-50F	KP2742-1-62F
		KP2742-1-50F-B25	KP2742-1-62F-B25




Thread-On Gas Nozzle

### BARREL LINERS

Angle (Degrees)	Barrel Size	Part Number
45° and 60°	Barrel Liner (.035 - 1/16")	KP2879-1
180°	Barrel Liner (.035 - 1/16")	KP2879-2

### DRIVE ROLLS

Wire Diameter in. (mm)	Part Number
.035-3/64 (0.9-1.2)	KP2876-1
1/16 (1.6)	KP2876-2

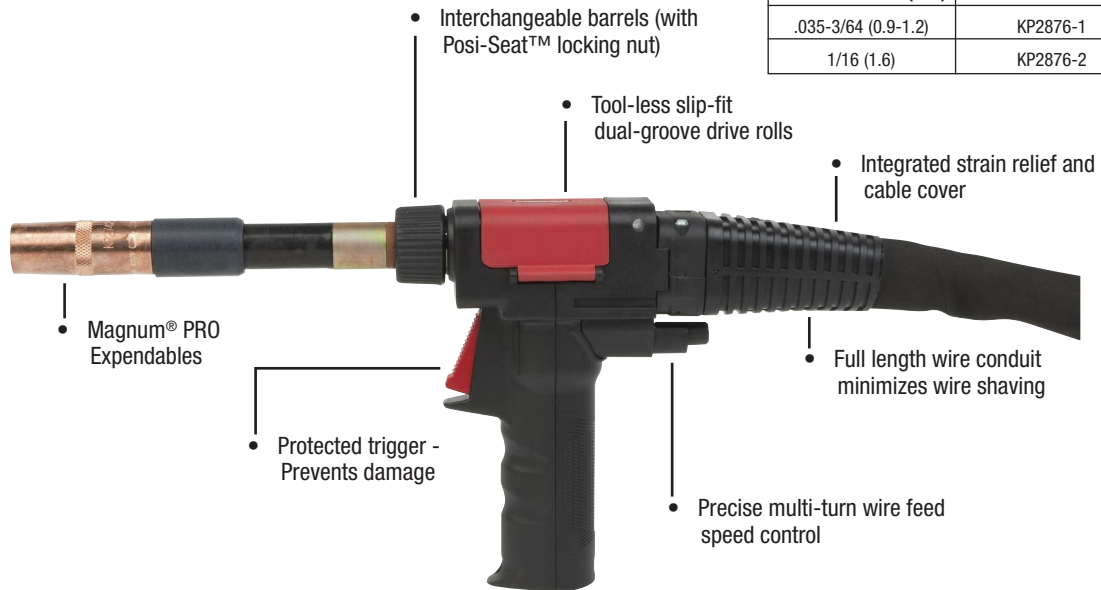

## PRODUCT SPECIFICATIONS

Product Name	Product Number	Amperage Rating	Wire Diameter Range		Cable Length ft. (m)
			in.	(mm)	
Cougar™ Air Cooled	K2704-2	Argon: 300A @ 60% Duty Cycle	.035 - 1/16	(0.9 - 1.6)	25 (7.6)
Cougar™ Air Cooled	K2704-3	Argon: 300A @ 60% Duty Cycle	.035 - 1/16	(0.9 - 1.6)	50 (15.2)

## CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to [www.lincolnelectric.com](http://www.lincolnelectric.com) for any updated information.